



## PRODUCT DATA SHEET

# STAIR NOSINGS

**4**  
YEAR  
WARRANTY

## Cleartread 1CI

Clearview offers a comprehensive range of architecturally designed profiles to meet every demand, from heavy duty traffic in railway stations to the more general retail/office use, providing maximum pedestrian safety and WHS requirements. Clearview Stair Nosings are manufactured to meet and exceed the Australian standards and building codes.

### SPECIFICATIONS

PRODUCT	<b>Cleartread Stairnosing</b>
CODE	<b>1CI</b>
MATERIAL	Alloy: 6060, Temper: T5
INSERT TYPE	Solid Epoxy Based Carborundum – Heavy Duty, External Grade
OVERALL DIMENSIONS	54mm x 2.6mm
PRODUCT WARRANTY	4 years (As per Clearview's Standard Warranty)
SLIP RATING	P5
CODE COMPLIANCE	AS/NZS1428.4.1:2009, BCA 2014 (Subject to surrounding floor finish luminance)
FIXING METHOD	Fix with adhesive



### PROFILE



A 54mm

B 2.6mm

### STANDARD COLOURS

#### Aluminium



CLEAR ANODISED



BLACK ANODISED



GOLD ANODISED

#### Insert



SAFETY YELLOW



BLACK



LUMINESCENT




RED



GREY

### TYPICAL INSTALLATION

Fix with adhesive

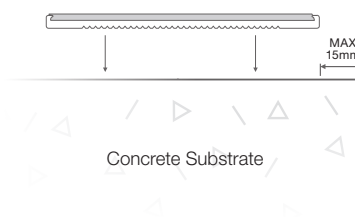

### HOW TO SPECIFY

Copy the prewritten specification below and update all sections in brackets to create your project specification.

#### Description

Clearview Stairnosing Profile in Code: 1CI in (Clear/Black/Sovereign Gold) anodised finish aluminium with insert colour (SY/BLK/R/G/LUM). To be installed to the manufacturer's instructions in accordance to the AS/NZS 1428.1.4.2009

#### Manufacturer

Clearview Tactiles  
P: 1300 884 948  
E: sales@clearviewtactiles.com.au  
W: www.clearviewtactiles.com.au

#### Example – Typical Specification

Clearview Stairnosing Profile in Code: 1CI in Clear anodised finish aluminium with insert colour black. To be installed in accordance to the manufacturer's instructions in accordance to the AS/NZS 1428.1.4.2009